
DATASHEET

RAIL REINFORCEMENT ROOF EXIT

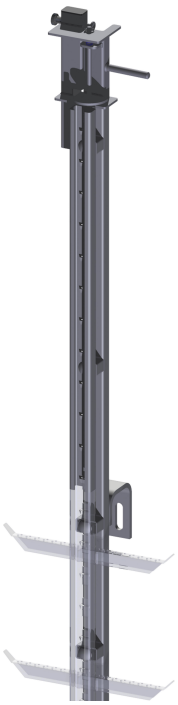

GENERAL

Art.Nr:	TAC-0250	Net weight:	14.17 kg
GTIN:	4030281147251	Gross weight:	14.17 kg
E-class number:	40-02-01-90		
Customs tariff number:	73269098		

DATASHEET

RAIL REINFORCEMENT ROOF EXIT

RAIL REINFORCEMENT ROOF EXIT is used to safely exit the ladder and cross over to the flat roof. The rail reinforcement with integrated roof exit is the end of the climbing protection ladder, the climbing barrier is omitted. The exit can be swivelled through 180°. The upper edge of the roof exit should be at least 1000 mm above the upper edge of the exit level. A stile reinforcement must extend downwards over at least two fastening brackets.

FEATURES

Colour:	Silver
Maximum number of persons:	1
Maximum load:	150.00 kg
Rope access technique:	No
Vertical systems:	Vertical rail system

DIMENSIONS

Rail length:	0.84 m
Rail width:	0.06 m
Max height:	2250 mm
Minimum height:	2250 mm

MATERIAL

Material:	Steel